





**Touch Screen Face Attendance
And Access Control System**

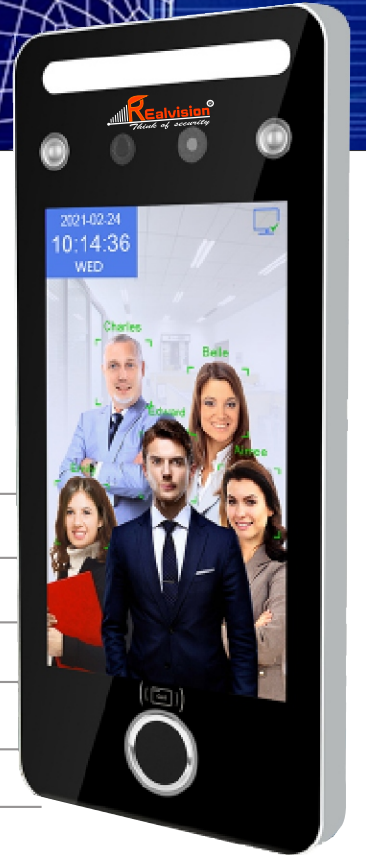

**Dynamic Multi Facial Recognition
Attendance & Access Control System**

Specifications

Screen	5.0 Inch, HD 1280 X720, Touch Screen
Keypad	Touch Keypad
Operation System	LINUX 3.10
CPU, NPU	1.2G Dual-Core ARM Cortex-A7,600G(0.6T)
RAM	256MB DDR3
ROM	eMMC Flash 4GB
Binocular Camera	200W Colorful WDR+200W Infrared Live Camera
Logs Capacity	500000
Face Capacity	5000 (50000 Optional)
Fingerprint Capacity /Card Capacity	5000 (50000 Optional) / 5000 (50000 Optional)
Password Capacity	5000 (50000 Optional)
Recognition Speed	<0.2s, Support Single User / Multi User (At most 5 users) recognition at same time
Recognition Distance	0.5 ~ 2.5 meters (0.5~1.5 meters with live Face recognition on)
Prevent Photo	Dual Camera anti-counterfeiting, prevent Recognition with photo/video
WDR	Wide Dynamic range, Support Accurate Face Recognition Under Strong Light, Dark light And Backlight
USB	USB2.0 x 1, Support U disk import /export data
Power Supply	DC 12V Interface x 1
Face Recognition Accuracy	99.70%
Network Communication	TCP/IP, Support C/S LAN Communication. Wifi (Optional)
Environmental Adaptability	Working Temperature : 15° C ~+45° C (Storage Temperature -40°C~+65°C) Working Humidity: 20% ~ 90%
Language	English
Broadcase and ringh	Display Name, Voice broadcase name
QR Code Scanner	Support
Working Voltage	DC12V
Machine	188 x 80 x 20mm



Multi-Face Detection



Access Control



Touch Screen




RFID Reader



USB Disk



Touch Screen



720 x 1280 HD Screen



Wi-Fi (Optional)



TCP/IP



Personal Identity Number



+91-11-43521961
+91-9811098258

Call For Enquiry



[Http://www.realvisionsecurity.in](http://www.realvisionsecurity.in)